




MANUFACTURING MEXICO,S.A.DE C.V.

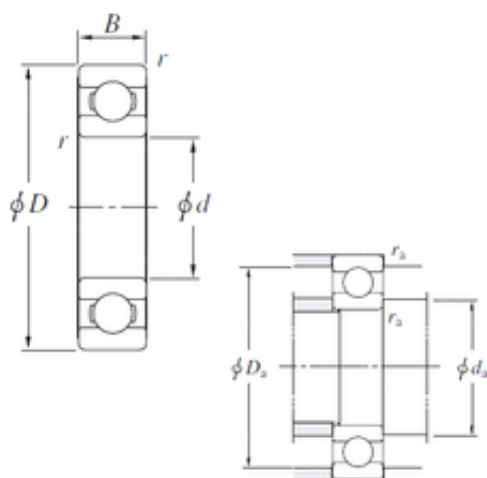

6922 KOYO Single-row deep groove ball bearings

Bearing No. 6922

6922 Bearing 2D drawings and 3D CAD models

Size	110x150x20 mm
Bore Diameter	110 mm
Outer Diameter	150 mm
Width	20 mm
d	110 mm
D	150 mm
B	20 mm
C	20 mm
r min.	1,1 mm
da min.	116,5 mm
Da max.	143,5 mm
ra max.	1 mm
Weight	1,04 Kg
Basic dynamic load rating (C)	47,9 kN
Basic static load rating (C0)	47,8 kN
(Grease) Lubrication Speed	4100 r/min
(Oil) Lubrication Speed	4900 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	KOYO
Minimum Buy Quantity	N/A
Weight / Kilogram	0.932
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0



MANUFACTURING MEXICO,S.A.DE C.V.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	110MM Bore; 150MM Outside Diameter; 20MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.koyousa.com
Manufacturer Item Number	6922
Weight / LBS	2.055
Bore	4.331 Inch 110 Millimeter
Outside Diameter	5.906 Inch 150 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Bearing No.	6922
r(min)	1.1
Cr	59.9
C0r	47.8
Cu	2.20
f0	16.4
Grease lub.	4100
Oil lub.	4900



MANUFACTURING MEXICO,S.A.DE C.V.

da(min)	116.5
Da(max)	143.5
ra(max)	1
(Refer.)Mass(kg)	1.04